



KARZASOL LTO levylämmönvaihdin

- Soveltuu lämmitys, käyttövesi, aurinkolämmitys, jäähdytysjärjestelmät, lämpöpumput, lvi-järjestelmät jne. Teholuokitus virtauksien ja lämpötilaerojen mukaisesti 30 ...300 kW
- **80 levyä**
- **316L ruostumaton teräs**
- **DN50 laippaliitos**
- **K616*S239*L191**
- **Lämpötila-alue – 160 ... +200 C**
- **Maksimivirtaus 45 m3/h**
- **Max käyttöpain: 30 bar**
- **Paino noin 47 kg**
- **Takuu 12 kk**



B3-095 Braze Plate Heat Exchanger

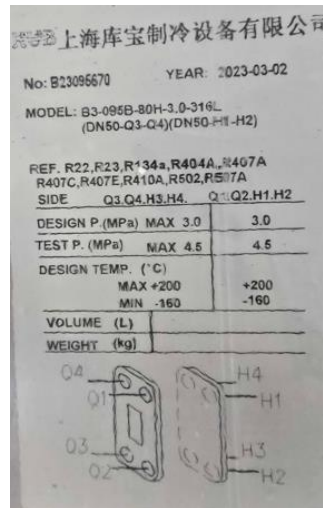

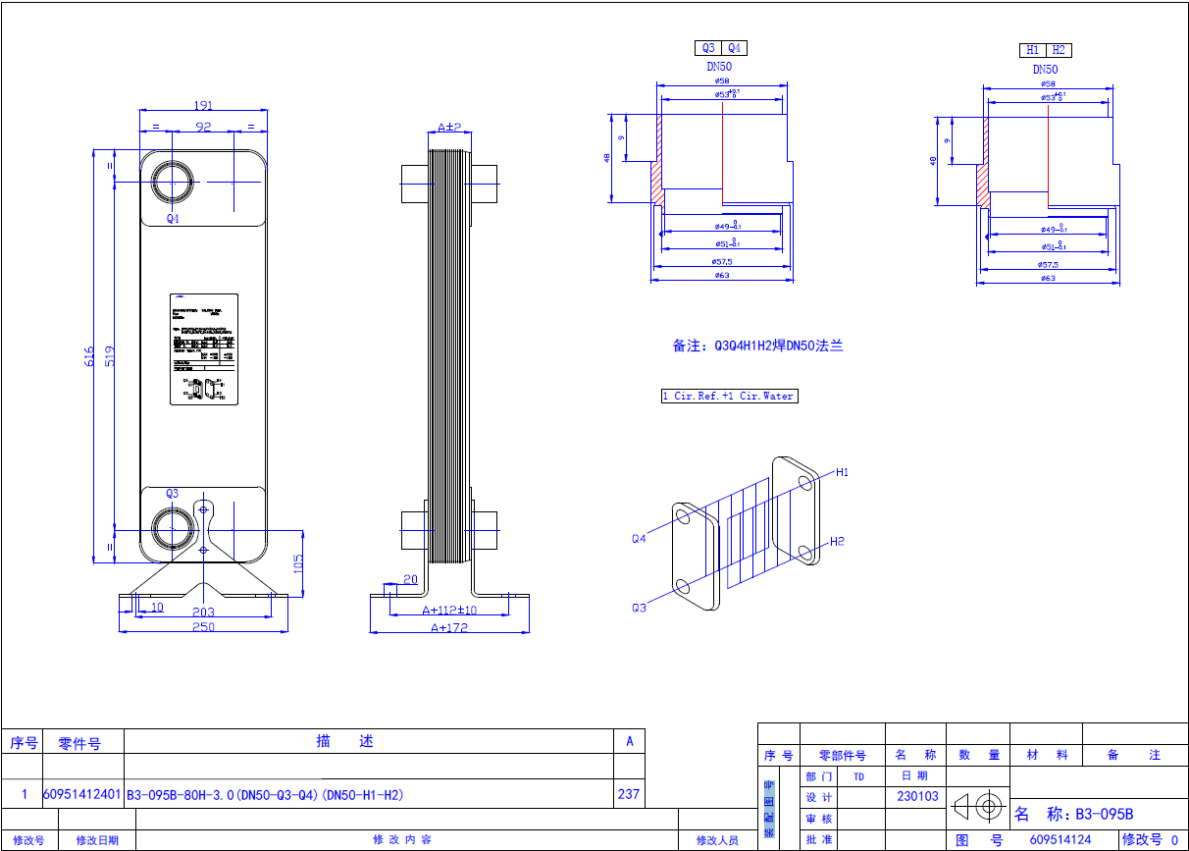

序号	零件号	描述	A
1	60951412401	B3-095B-80H-3.0 (DN50-Q3-Q4) (DN50-H1-H2)	237
修改号	修改日期	修改内容	修改人员

序号	零件号	名称	数量	材料	备注
部门	TD	日期			
设计		230103			
审核					名称: B3-095B
批准					图号: 609514124 修改号: 0

B3-095型号 (N为板片数) Model B3-095 (N:number of fins)

板片包厚度A (mm)	重量 (kg)	单侧通道容积 (L)	有效换热面积 (m²)
Envelop thickness of finsA±5(mm)	Weight	Volume of one-side passage	Effective working area
11+2.8N (±5)	6+0.39N	0.125 (N-2)	0.095× (N-2)

B3-095型号参数 Parameters of Model B3-095		
单片换热面积 Working area of one fin	0.095 (m²)	
产品承压等级 Type of product	3.0Mpa级	4.5Mpa级
设计压力 Designed pressure	3.0Mpa	4.5Mpa
测试压力 Testing pressure	4.5Mpa	6.5Mpa
设计温度 Designed temperature	-160℃~+200℃	
水侧最大流量 Max.flowrate at the water side	45m³/h	
最大组装片数 Number of fins in the maximum assembly	120片	
板片通道类型 Type of fin passage	D、X、H	
产品结构类型 Type of product structure	A、B、C	
板片可选材料 Materials of fin	304、316L	

B3-095型号可选接管 Optional connections of Model B3-095	
接管类型 Type of connections	接管型号 Model of connections
光杆焊接接管 Screwless welded connection	H407/H410/H411/H413/H414/H415/ H520/H521/D428/D432/D44
外锥螺纹接管 Taper male thread connection	R414/R520
外直螺纹接管 Straight male thread connection	W414/W520
内追螺纹接管 Taper female thread connection	C404/C406/C410/C514
内直螺纹接管 Straight female thread connection	N404/N406/N410/N512/N514/N520
卡箍式接管 Clipped connection	J414/J520
法兰接管 Flanged connection	DN54单法兰/DN54双法兰 DN54 single flange/DN54 double flanges
接管具体尺寸请参阅接管图库 Refer to the list of connections for detailed dimensions	